


Female coupling

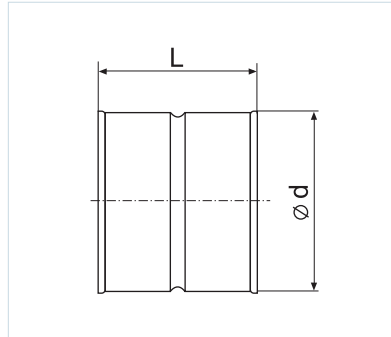

Type	Diameter (d), mm	Steel thickness (p), mm	Length (L), mm
Female coupling 100	100	0.55	140
Female coupling 110	110	0.55	140
Female coupling 125	125	0.55	140
Female coupling 140	140	0.55	140
Female coupling 150	150	0.55	140
Female coupling 160	160	0.55	140
Female coupling 180	180	0.55	140
Female coupling 200	200	0.55	140
Female coupling 224	224	0.55	140
Female coupling 250	250	0.55	140
Female coupling 280	280	0.55	140
Female coupling 315	315	0.55	140
Female coupling 355	355	0.55	140
Female coupling 400	400	0.70	140
Female coupling 450	450	0.70	140
Female coupling 500	500	0.70	140
Female coupling 560	560	0.70	180
Female coupling 600	600	0.70	180
Female coupling 630	630	0.70	180
Female coupling 710	710	0.70	180
Female coupling 800	800	0.70	180
Female coupling 900	900	1.00	180
Female coupling 1000	1000	1.00	200
Female coupling 1120	1120	1.00	200
Female coupling 1250	1250	1.00	200
Female coupling 1400	1400	1.00	200
Female coupling 1600	1600	1.00	200