


**Polyvent 615 series**



**615**



**6150**

Flexible polyurethane non-insulated air ducts with steel wire frame (75 and 150 µm)

**Description**

- Flexible air duct from polyethylene with high-carbon steel wire frame.

**Features**

- Pollution-free, no harmful substances emission during operation.
- Contents no chlorine and cadmium.


**Recommended application**

- Applied in residential ventilation systems.
- Recommended for ventilation of child care centres, educational and medial facilities, spa resorts.

**Technical data**

Item	615	6150
Range of sizes [mm]	Ø 102; 127; 152; 182	55x110; 70x150; 80x150; 54x222
Air duct base	Polyethylene film ( 150 µm)	Polyethylene film (150 µm)
Air duct wire	steel spring, 0.8 mm thick	
Operating temperature range [°C]	-18...+70	
Standard length [m]	6	
Available lengths (cutting) [m]	6	
Air speed [m/s]	30	
Maximum operating pressure [Pa]	3000	

**Colour range**




White  
( )


**Packing**



Cardboard box




Unit coloured packing



Net

**Order code**

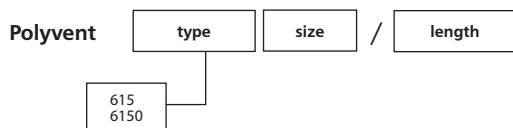

**Accessories**

